

Pistol Grip Power Tool Handle and Trigger Size Effects on Grip Exertions and Operator Preference

SEOUNGYEON OH and ROBERT G. RADWIN,¹ *University of Wisconsin, Madison, Wisconsin*

Finger and palmar forces were measured during actual pneumatic nutrunner operation using a strain gauge dynamometer. Eighteen student subjects were assigned to one of three categories based on hand length. Two triggers and four handle spans were presented randomly. Handle span affected maximal and sub-maximal grip force. As span increased from 4 cm to 7 cm, average peak finger force increased 24%, peak palmar force increased 22%, and average finger and palmar tool-holding forces increased 20%. When an extended trigger was used, average peak finger force decreased 9%, peak palmar force decreased 8%, finger tool-holding force decreased 65%, and palmar tool-holding force decreased 48%. Hand size affected grip strength (MVC), grip force, and exertion level (force/MVC). Holding exertion level was maximum for large-handed subjects using a 4-cm handle and for small-handed subjects using a 7-cm handle. Subjective handle span preference increased as hand size increased. A similar experiment was performed using 11 factory workers.

INTRODUCTION

Pneumatic hand-held power tools are widely used in industry. Power tools reduce manual force requirements, shorten the time to accomplish tasks, and improve the quality of work. The use of power tools, however, is not without stress. Rauko, Herranen, and Vuori (1988) interviewed 66 workers from two companies in Finland. Their investigation showed that one in five workers (20%) felt that the most stressful task in their work

was connected directly to the use of pneumatic screwdrivers and nutrunners. There is also growing concern about designing and selecting power tools for preventing cumulative trauma disorders (CTDs).

Repetitive motion, forceful exertion, awkward posture, contact stress, cold temperature, and vibration are risk factors often associated with CTDs (Armstrong, Radwin, Hansen, and Kennedy, 1986). The use of pneumatic power tools may involve one or more of these risk factors. The best method currently available for preventing cumulative trauma disorders is to minimize risk factors associated with tasks, tools, and the workplace (Armstrong, 1986). Risk factors

¹ Requests for reprints should be sent to Robert G. Radwin, Department of Industrial Engineering, University of Wisconsin-Madison, 1513 University Ave., Madison, WI 53706.

associated with trigger and handle design are the focus of the current study.

A CTD risk factor related to trigger design is stress concentrations at the volar side of the fingers. The CTD known as *trigger finger*, or *stenosing tenosynovitis crepitans* (Bonnici and Spencer, 1988; Nasca, 1980), is associated with repeatedly operating the trigger of a pistol grip power tool when this risk factor is present. Multifinger-operated triggers have been suggested as a way of redistributing finger force over two or more fingers when activating a power tool and thus reducing contact stress (Lindqvist, Ahlberg, and Skogsberg, 1986; Putz-Anderson, 1988). Use of these tool modifications, however, may affect how the tool is handled. It is not known whether tool operators distribute the required force among the fingers or whether the sum of the forces produced by each finger is greater than the force exerted using only one finger.

Multifinger-operated triggers also leave fewer fingers available for holding and supporting the tool. The remaining fingers are often the fourth and fifth digits, the ones that are the weakest and contribute the least force. Studies have shown that the index and middle fingers contribute more to the resultant grip force than do the ring or small finger, and that individual finger contribution is influenced by exertion level (Amis, 1987; Radwin, Oh, Jensen, and Webster, 1992). This study investigates the effect of multifinger triggers on finger exertions during tool operation.

Previous research in tool handle design has focused on finding the optimal handle dimensions. Recommendations for handle size were often based on the span that maximizes grip strength or minimizes fatigue. Hertzberg (1955), in an early air force study, reported that a handle span of 6.4 cm maximized power grip strength. Ayoub and Lo Presti (1971) found that a 3.8-cm diameter was optimum for a cylindrical handle. This was

based on maximizing the ratio between strength and electromyographic activity, and on the number of work cycles before onset of fatigue. Greenberg and Chaffin (1975) recommended that a tool handle span be in the range of 6.4 cm and 8.9 cm in order to achieve high grip forces. Another study, by Petrofsky, Williams, Kamen, and Lind (1980), showed that the greatest grip strength occurred at a handle span between 5 and 6 cm.

Grip strength is also affected by hand size. Fitzhugh (1973) showed that the handle span resulting in maximum grip strength for a 95th-percentile male hand length is larger than the handle span for that of a 50th-percentile female. Therefore it is hypothesized that a person with a small hand may benefit from using a smaller handle, compared with a person with a large hand. This study tests that hypothesis.

The underlying assumption in designing handles based on maximum grip strength is that the actual force exerted is independent of handle size. If the grip force used during tool operation is the same for all handle sizes, then the handle span associated with the greatest grip strength will result in the lowest exertion level. *Exertion level* in this paper is defined as the ratio of the actual grip force used to the maximum voluntary contraction (MVC) force-generating capacity (force/MVC). If grip force is affected by handle size, then the handle span associated with the greatest grip strength may not be the handle span resulting in the minimum exertion level. This study investigates the validity of that assumption.

The effects of hand size, handle span, and trigger type on grip exertions during actual tool operation were investigated in this study using an automatic shut-off pistol grip power tool. A tool handle instrumented with strain gauges was attached to a functioning power tool for measuring the forces exerted when operating the tool. The relationships among

anthropometry, force, and subjective preferences were also considered.

METHODS

Experimental Apparatus

An apparatus was constructed for simulating a pneumatic pistol grip nutrunner in order to measure forces produced during tool operation. Two strain gauge dynamometers were installed in a handle for measuring forces at the finger and palmar sides. The dynamometer handle was attached perpendicularly to a modified in-line pneumatic nutrunner motor in the configuration of a pistol grip power tool and mounted on a rigid frame (see Figure 1). The motor was a 1000-rpm Ingersoll-Rand 6W-TM3 nutrunner. This motor contained an automatic air shut-off torque control mechanism and was operated at a $6.8\text{-N}\cdot\text{m}$ torque setting. The two dynamometers were mounted in parallel on a track so

the handle span could be continuously adjusted between 40 mm and 132 mm.

The aluminum dynamometers were constructed so their force sensitivity was independent of the point of application. They were able to add force linearly along the handle length by measuring the shearing stress in the cross section of a beam using strain gauges aligned 45 deg to the long axis (Pronk and Niesing, 1981). Details of the dynamometer construction are provided in Radwin, Masters, and Lupton (1991). These dynamometers were calibrated by suspending weights, ranging from 0.5 kg to 10 kg, perpendicular to the handle in the axis of sensitivity. Least squares linear regression indicated that the force sensitivity of the beams was 2 mV/N with a coefficient of determination $R^2 = 0.99$.

Two plastic caps were attached to the dynamometer beams in order to simulate the contours of a power tool handle. The finger side cap was 24 mm wide and the palmar side

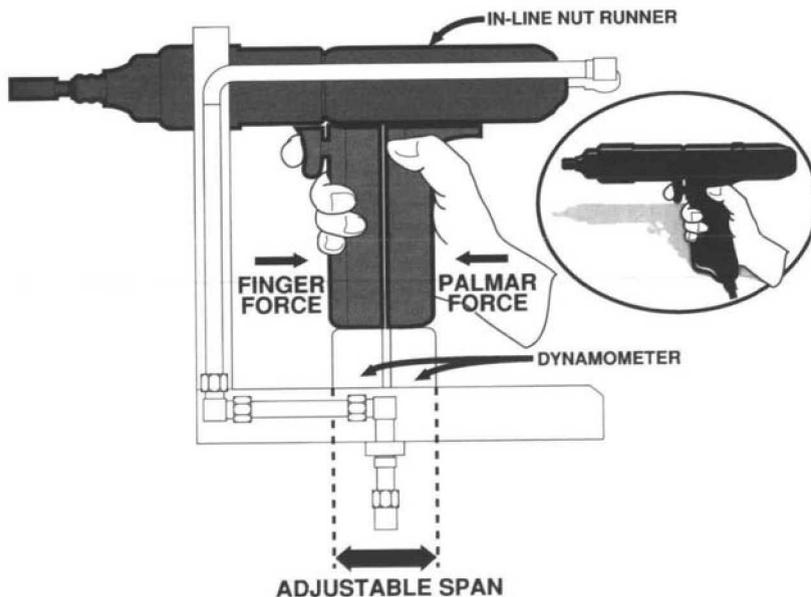


Figure 1. *Experimental apparatus used for simulating a pistol grip power tool. The device has an adjustable handle span and strain gauge dynamometers inside the handle. The inset shows how the apparatus simulates the shape of a pistol grip power tool.*

cap was 32 mm wide. Both caps were 129 mm long, and the contact surface was curved, having a radius of curvature of 159 mm. The circumference of the handle for a span of 4 cm was 12 cm, measured between two points tangent to the cap contact surfaces. The handle circumference increased an additional 2 cm as the handle span was increased by 1 cm. The tool trigger was mounted on the finger side cap of the handle, similar to a conventional hand tool (see Figure 1).

Two different trigger types were used. One was a conventional power tool trigger, activated using only the index finger. The second was longer than the conventional trigger and activated using both the index and middle fingers. These two triggers are depicted on power tools in Figure 2. The conventional trigger was 21 mm long and the extended trigger was 48 mm long. A leaf spring for controlling tension and a contact switch were installed inside the triggers. When the trigger was squeezed, the switch tripped a relay and

a solenoid valve for supplying air to the power tool motor. Activation force, measured using a Chatillon force gauge, was approximately the same for both triggers. The conventional trigger required 8 N, and the extended trigger required 11 N for activation.

Ten bolts were contained in threaded holes in a vertical 13-mm-thick steel panel. The bolts were 7.3-cm long, 1.6-cm diameter, number 18 screws with a 1.4-cm hex head. Belleville washers were used for controlling the torque rate. The washers' outside diameter was 4.0 cm, the inside diameter was 2.0 cm, and the thickness was 0.2 cm. The holes in the panel were located in two rows of five across. The vertical location of the screw panel was controlled using an adjustable platform that allowed all subjects to hold the tool at elbow height using a neutral wrist posture.

An overhead spring balancer was used for counterbalancing the weight of the simulated tool. The tool weighed 2.65 kg without the

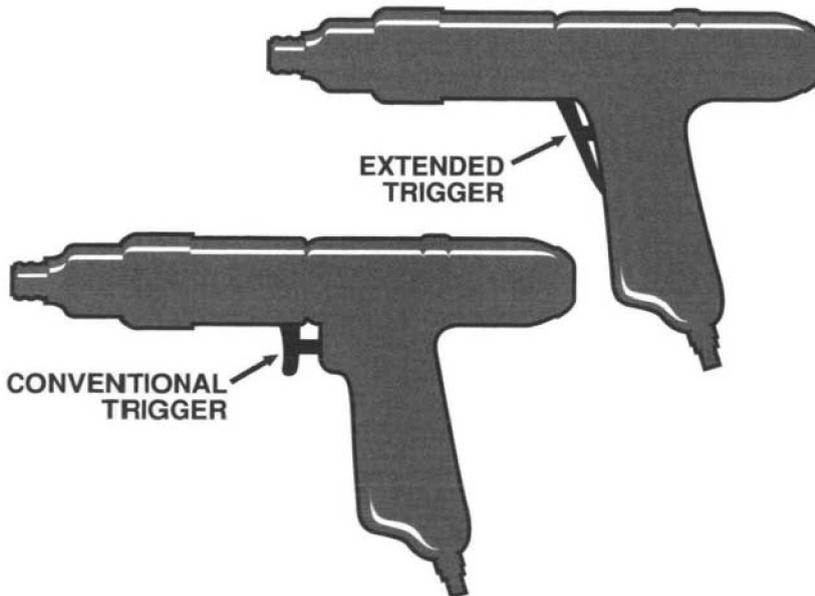


Figure 2. A conventional trigger and an extended-length trigger on pistol grip power tools.

balancer and was 0.25 kg with the balancer installed. Because the counterbalance force was proportional to displacement, the distance between the spring balancer and the screw panel was kept constant so the counterforce was the same for each subject.

The outputs of the two dynamometers were sampled using a GW Instruments MacADIOS II 12-bit analog-to-digital converter. Activation of the trigger was also monitored by recording the relay voltage. Sample rate was 30 Hz for a sampling period of 50 s. Data acquisition was controlled using an Apple Macintosh II microcomputer and National LabView software.

Subjects

Two groups of subjects were studied. The first included inexperienced tool operators from the University of Wisconsin-Madison campus. The second group included experienced tool operators recruited from two local automobile assembly plants.

Subjects were arbitrarily divided into three categories according to their hand length. Hand length up to 17 cm was classified as small, between 17 cm and 19 cm as medium, and greater than 19 cm as large. A hand length of 17 cm corresponded to a 21st-percentile female or a 0.3-percentile male. A hand length of 19 cm corresponded to an 88th-percentile female or a 35th-percentile male (Greiner, 1991).

University students. Students were recruited by posting advertisements on bulletin boards in university buildings or by invitation of the experimenter. Participants had no history of hand injuries or neuromuscular disorder symptoms. They were paid for their participation on an hourly basis.

Participating in this experiment were 18 students: 7 males and 11 females. After the first 15 subjects were randomly recruited, 4 were classified as having small hands, 5 as

medium, and 6 as large. Based on their hand length, two additional small-handed subjects and one medium-handed subject were recruited to have the same number of subjects in each size category. The average hand length was 17.1 cm ($SD = 1.0$ cm) for the females and 19.9 cm ($SD = 0.8$ cm) for the males. All 18 subjects described themselves as right-handed and reported no prior experience using pneumatic power tools. A summary of student subject anthropometric characteristics is included in Table 1.

Factory workers. Eleven factory workers were recruited from two automobile assembly plants in the midwestern United States. Subjects were selected based on their experience using pistol grip pneumatic power hand tools. Of the 11 subjects, 8 were currently using similar pistol grip pneumatic power hand tools with shut-off torque between 4.5 N·m and 6.8 N·m in their jobs. The remaining three subjects reported that they had previous experience in using pistol grip pneumatic power hand tools in their jobs for at least one year.

Eight subjects were male and three were female. Average hand length was 19.0 cm ($SD = 1.2$ cm) for the females and 19.5 cm ($SD = 1.1$ cm) for the males. Ten subjects described themselves as right-handed and one subject as left-handed. Five subjects were classified with medium hands and six with large hands. A summary of the factory worker anthropometric characteristics is listed in Table 2.

Experimental Procedures

Prior to the experiment, a power grip strength test for the dominant hand was administered to subjects while they stood in the same posture used for operating the power tool. Grip strength was measured using a strain gauge dynamometer of similar dimensions as those of the power tool simulator handle. Grip force was recorded for 3 s, and MVC level was calculated by averaging

TABLE 1

Summary of University Student Characteristics

Hand Size Category	Age (years)	Hand Length (cm)	Hand Length Percentile ^a	Gender	Hand Width (cm)	Palm Length (cm)	Mean Grip Strength (N) ^b
Small	22	15.7	1.1	F	7.5	9.5	236 ± 47
	21	16.2	4.4	F	7.6	9.3	152 ± 13
	20	16.4	7.3	F	7.4	9.5	220 ± 22
	20	16.6	10.7	F	7.6	9.6	179 ± 20
	20	16.7	13.0	F	7.4	9.4	122 ± 28
	29	16.7	13.0	F	7.4	9.8	181 ± 15
Medium	24	17.1	24.7	F	8.3	10.0	346 ± 43
	26	17.4	39.2	F	8.0	10.9	195 ± 21
	20	18.1	61.4	F	8.2	10.7	181 ± 17
	20	18.3	70.7	F	8.3	10.0	115 ± 24
	31	18.8	27.5	M	8.7	10.9	382 ± 97
	24	18.9	86.5	F	8.1	10.5	273 ± 46
Large	25	19.2	43.3	M	8.6	10.9	286 ± 29
	29	19.8	66.8	M	8.7	11.1	308 ± 26
	23	20.0	73.4	M	9.9	11.2	525 ± 137
	26	20.1	76.4	M	8.4	11.5	433 ± 58
	34	20.8	90.8	M	9.0	12.2	399 ± 85
	22	20.9	91.9	M	9.5	11.9	492 ± 86
Mean	24	18.5			8.3	10.5	279
SD	4	1.7			0.7	0.9	133

^a Male and female hand length percentiles are calculated separately based on Greiner (1991) data.

^b Average grip strength at spans of 4 cm, 5 cm, 6 cm, and 7 cm ± one standard deviation.

for 1.5 s after maximum voluntary contraction was fully developed. Five different handle spans, ranging from 4 cm to 8 cm, in 1-cm increments, were presented randomly. A 4-min rest period was given between trials. Because some of the small-handed subjects were unable to hold the tool handle at the 8-cm handle span, that condition was eliminated from the experiment.

Fifteen minutes were provided for training and practice operating the power tool. During training subjects had an opportunity to use the tool simulator with the conventional trigger and with the extended trigger for a handle span of 5.5 cm. Subjects were given more time if they requested it. Numbers were assigned to each bolt, and subjects followed the same sequence. Because tool torque was controlled by an air shut-off mechanism, sub-

jects were instructed to release the trigger after the tool stopped automatically.

All combinations of two types of triggers and four handle spans were presented randomly. Subjects were required to tighten 10 bolts in succession in a 50-s period for each trial. Three replications were performed for each experimental condition. A 1-min rest was given after finishing each trial. Every subject operated the power tool for all experimental conditions.

A representative force record during tool operation is plotted against time in Figure 3. The peak force at the finger and palmar sides of the tool handle was determined for each of the 10 bolts in a single trial, then averaged. *Peak force* was defined as the maximum force achieved each time the tool was activated. The average tool-holding force used between

TABLE 2

Summary of Factory Worker Characteristics

Hand Size Category	Age (years)	Hand Length (cm)	Hand Length Percentile ^a	Gender	Hand Width (cm)	Palm Length (cm)	Mean Grip Strength (N) ^b	Experience Using Pistol Grip Power Tools (years)
Medium	46	18.1	63.6	F	8.7	10.7	221 ± 41	4
	41	18.3	12.7	M	9.2	11.2	411 ± 36	3
	52	18.4	15.0	M	8.9	10.3	313 ± 58	10
	46	18.5	76.9	F	7.8	10.2	259 ± 17	3
	51	19.0	35.0	M	9.7	10.7	315 ± 46	24
Large	51	19.1	39.2	M	9.6	10.5	328 ± 71	25
	48	19.5	55.4	M	10.1	11.3	277 ± 24	23
	49	20.0	73.4	M	9.2	11.6	391 ± 120	2
	60	20.3	99.2	F	8.7	11.2	289 ± 52	16
	43	20.8	90.8	M	10.3	11.6	384 ± 83	3
	39	21.2	95.2	M	10.3	11.8	413 ± 151	1
Mean	48	19.4			9.3	11.0	327	10
SD	6	1.1			0.8	0.6	90	10

^a Male and female hand length percentiles are calculated separately based on Greiner (1991) data.

^b Average grip strength at spans of 4 cm, 5 cm, 6 cm and 7 cm ± one standard deviation.

screws was also computed from the finger and palmar sides of the handle. *Holding force* was defined as the force used for holding the tool when the trigger was off. Because a certain amount of force was required to activate the trigger, a small lag occurred between holding the handle and initiating trigger activation, and between trigger deactivation and holding the handle. Both of these lags were accounted for by eliminating 0.1 s before and after trigger activation. Exertion levels were reported in terms of percentage of maximum voluntary contraction (%MVC), calculated by taking the ratio of the peak force to grip strength for a given handle span.

Analysis of variance (ANOVA) was used for testing statistically significant effects for the full factorial experimental design. Subject was a random effect variable nested within hand length. Trigger type, handle span, and hand length were fixed-effect variables. Because there were no small-handed subjects in the worker group, the data were pooled and the hand length variable was eliminated for

that study. Only the third replication for each experimental condition was used in the data analysis in order to eliminate learning effects.

After completing all handle and trigger combinations, subjects were asked which handle span they preferred for each trigger type and which trigger type they preferred overall. They were given another opportunity

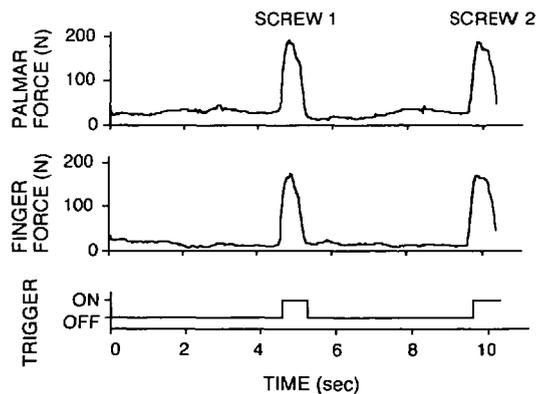


Figure 3. Representative finger force and palmar force measured while handling a tool and during tool operation.

to operate the tool and readjust the handle span until they were satisfied with their selection. The preferred span was then measured using a Fowler Ultra-cal II digital caliper.

RESULTS AND DISCUSSION

Grip Strength

Individual subject grip strength is given for each subject group in Tables 1 and 2. Grip strength, averaged over the four handle spans, was 200 N ($SD = 70$ N) for the female students and 404 N ($SD = 111$ N) for the male students. Average grip strength was 256 N ($SD = 46$ N) for the female factory workers and 354 N ($SD = 89$ N) for the male factory workers.

Average grip strength is plotted against handle span in Figure 4. Handle span had a significant effect on grip strength for student subjects (see Table 3) and worker subjects (see Table 4). Grip strength increased significantly as span increased from 4 cm to 5 cm for students (see Table 5) and factory workers (see Table 6).

The shape of the strength curve plotted against handle span was the familiar inverted U, similar to the results reported in numerous other grip strength studies (see Figure 4). The span resulting in maximum grip strength also agreed with the findings from previous strength investigations (Hertzberg, 1955; Petrofsky et al., 1980). Among student subjects, 17 of 18, and 10 of the 11 worker subjects, recorded their maximum grip strength for a span of 5 cm to 6 cm in this experiment (see Figure 4).

Although the handle span resulting in maximum grip strength and the grip strength function agreed with previous findings, the grip strength magnitude for both student and worker subjects was less than what has been previously reported. Schmidt and Toews (1970) collected grip strength data from 1128 male and 80 female Kaiser Steel Corporation employee applicants using a Jamar dynamometer. For a handle span of 3.8 cm, they reported an average of 499 N for the dominant male hand and 308 N for the dominant female hand. Swanson, Matev, and De Groot (1970) measured the grip strength of 50

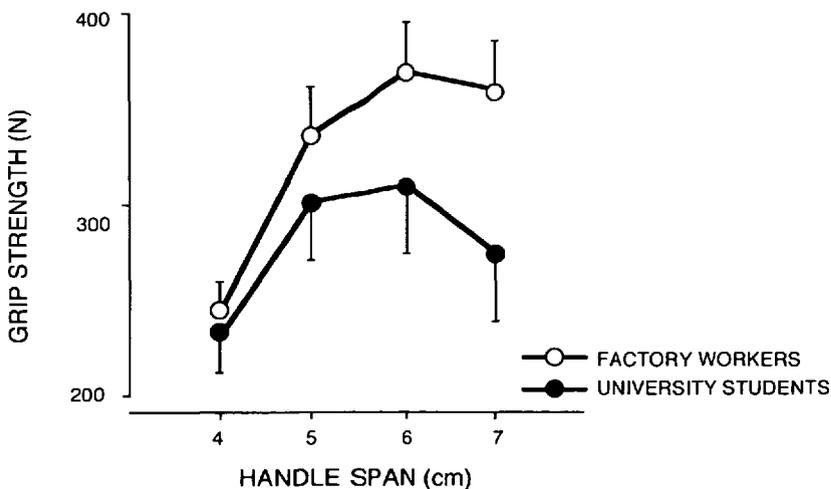


Figure 4. Average grip strength plotted against handle span for university students and factory workers. Error bars represent standard error of the mean.

TABLE 3

Summary of Significant ANOVA Effects for University Student Subjects

Variable	Effect	Degrees of Freedom		F	p
		Numerator	Denominator		
Grip strength	Length	2	15	11.1	0.001
	Span	3	45	14.1	<0.001
	Span × Length	6	45	3.3	0.009
Peak finger force	Type	1	15	8.4	0.011
	Span	3	45	8.4	<0.001
	Span × Length	6	45	2.3	0.051
Peak palmar force	Type	1	15	10.0	0.006
	Span	3	45	8.1	<0.001
	Span × Length	6	45	3.0	0.016
Peak finger exertion level	Type	1	15	4.9	0.042
	Span	3	45	4.5	0.008
Peak palmar exertion level	Type	1	15	4.8	0.045
	Span	3	45	4.8	0.005
Average finger holding force	Type	1	15	46.6	<0.001
	Span	3	45	6.2	0.001
Average palmar holding force	Type	1	15	46.6	<0.001
	Span	3	45	4.9	0.005
Average finger holding exertion level	Type	1	15	52.6	<0.001
Average palmar holding exertion level	Type	1	15	4.6	0.049
	Span	3	45	8.9	<0.001
	Span × Length	6	45	2.5	0.036

females and 50 males using a Jamar dynamometer. Among these subjects, 36 were light manual workers, 16 were sedentary workers, and 48 were manual workers. For a handle span of 6.4 cm, they reported 467 N for the male dominant hand and 241 N for the

female dominant hand. All these strength levels exceeded the levels observed in the current study.

Differences in maximum grip strength between previous studies and this investigation may be attributed to differences in the

TABLE 4

Summary of Significant ANOVA Effects for Industrial Factory Worker Subjects

Variable	Effect	Degrees of Freedom		F	p
		Numerator	Denominator		
Grip strength	Span	3	30	14.4	<0.001
Peak finger force	Span	3	30	13.5	<0.001
Peak palmar force	Span	3	30	9.2	<0.001
Average finger holding force	Type	1	9	145.1	<0.001
Average palmar holding force	Type	1	9	185.2	<0.001
Average finger holding exertion level	Type	1	10	134.8	<0.001
	Span	3	30	10.1	<0.001
Average palmar holding exertion level	Type	1	10	99.4	<0.001
	Span	3	30	8.8	<0.001

TABLE 5

Tukey Multiple Contrasts of Handle Span for University Student Subjects

<i>Span (cm)</i>	4	5	6	7
Grip strength (N)	231 (82)	302 (129)	310 (153)	274 (151)
Peak finger force (N)	106 (45)	131 (74)	131 (75)	131 (75)
Peak palmar force (N)	129 (63)	153 (90)	152 (86)	157 (94)
Average finger holding force (N)	20.1 (12.3)	24.6 (16.3)	24.8 (13.5)	24.1 (14.9)
Average palmar holding force (N)	28.0 (13.8)	33.7 (20.0)	33.2 (15.6)	33.5 (17.0)
Peak finger exertion level (%MVC)	48.9 (20.0)	46.4 (21.7)	45.9 (21.2)	53.1 (22.5)
Peak palmar exertion level (%MVC)	59.7 (26.9)	54.2 (25.6)	54.3 (25.3)	63.7 (27.1)
Average palmar holding exertion level (%MVC)	14.1 (9.5)	11.1 (7.4)	13.2 (9.5)	15.9 (11.2)

One standard deviation is listed in parenthesis. MVC = maximum voluntary contraction. Underlining indicates no significant difference ($p = 0.05$).

particular handles used and the methods used for collecting strength data. Grip strength data often used for handle design are based on the Jamar dynamometer, Smedley dynamometer, or similar instruments (Schmidt and Toews, 1970; Young et al., 1989) rather than on a handle representative of an actual tool. In most previous cases, only one dimension (handle span) was controlled, and the other handle dimensions were not necessarily similar to those of a tool handle. The Jamar and Smedley dynamometers have smaller circumferences and narrower widths than the tool handle used in this study. Also,

the tool handle curvature is straight, whereas the Jamar dynamometer has a curved surface at the grip center. The handle used in this study closely represented an actual tool handle circumference and width. These size and curvature differences can affect the position of the fingers and grip posture. Dimensional differences must therefore be considered when designing handles based on strength using published grip strength data.

Another difference between previous studies and this study is the method used for measuring grip strength. In the current study subjects were required to exert a maximum

TABLE 6

Tukey Multiple Contrasts of Handle Span for Industrial Factory Worker Subjects

<i>Span (cm)</i>	4	5	6	7
Grip strength (N)	244 (53)	336 (84)	369 (86)	360 (85)
Peak finger force (N)	142 (34)	190 (38)	193 (59)	184 (47)
Peak palmar force (N)	185 (37)	224 (47)	233 (69)	226 (53)
Average finger holding exertion level (%MVC)	13.0 (5.3)	11.0 (5.1)	8.8 (3.1)	8.8 (3.7)
Average palmar holding exertion level (%MVC)	16.8 (6.2)	14.1 (7.2)	11.4 (3.9)	11.4 (4.7)

One standard deviation is listed in parenthesis. MVC = maximum voluntary contraction. Underlining indicates no significant difference ($p = 0.05$).

power grip for 3 s. Grip strength was then calculated by averaging the force for 1.5 s after a full exertion was developed. Because the Jamar- and Smedley-type dynamometers record peak force, grip strength may seem somewhat greater in studies using those instruments, though great differences are not expected.

Grip strength significantly increased as hand length increased for the university student subjects (see Table 3). Average grip strength was 182 N ($SD = 46$ N) for the small hands, 249 N ($SD = 106$ N) for the medium hands, and 407 N ($SD = 114$ N) for the large hands. Figure 5 illustrates the interaction of Length \times Span for the student group. Maximum grip strength occurred at a handle span of 5 cm for the small- and medium-size hands and at a span of 6 cm for the large-size hands.

Submaximal Forces during Tool Operation

Peak finger and palmar forces, averaged over the two trigger types, are plotted against handle span in Figure 6. Peak finger and palmar forces significantly increased as handle span increased for both subject groups (see Tables 3 and 4). Both peak finger and palmar forces were significantly less for a handle

span of 4 cm than for handle spans of 6 cm and 7 cm (see Tables 5 and 6). Average peak finger and palmar force did not significantly increase ($p > 0.05$) when increasing handle span from 5 cm to 7 cm for either student or worker groups. Trigger type had a significant effect on peak finger and palmar forces for the student group (see Table 3). Average peak forces were consistently greater for the conventional trigger than for the extended trigger (see Table 7).

The dynamometer used in this experiment had its sensitivity directed along the horizontal axis, parallel to the tool trigger and spindle. Because the peak forces were less for the small handle span than for the larger handle spans, it may be possible that the fingers could wrap further around the handle, directing forces away from the dynamometer axis of sensitivity. However, because subjects were required to squeeze the trigger in order to operate the tool, the position of the distal index finger was controlled throughout the experiment regardless of the handle span. This means that it was unlikely that additional force components were directed away from the dynamometer axis of sensitivity and that the decreased forces observed for the small handle span resulted from force vectors directed away from the axis of sensitivity of the force transducer.

In order to replicate these findings, a follow-up pilot study was performed to further investigate how grip force may be affected by handle span. Three university students participated. They were instructed to grip a strain gauge dynamometer and lift it off a platform. A cable was attached to the dynamometer for suspending different weights. Subjects were allowed to select a finger position that was easily reproducible. Distal finger location at the dynamometer was kept the same for all handle spans. The locations of the distal fingers were marked on the dynamometer using a water-soluble marker.

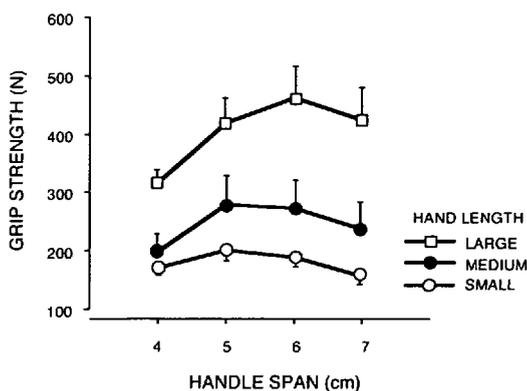


Figure 5. Average grip strength plotted against handle span for the three hand size categories for university students. Error bars represent standard error of the mean.

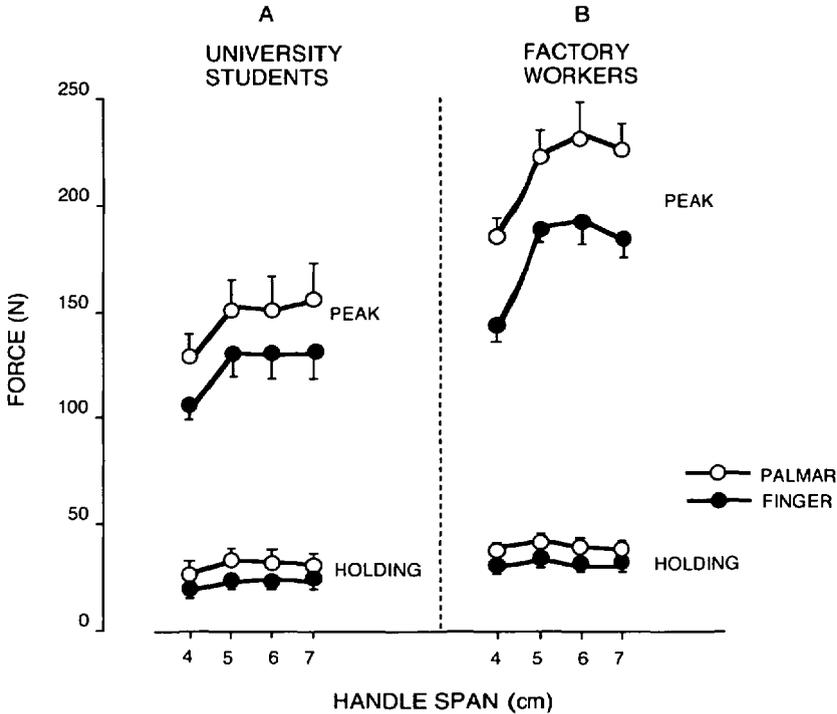


Figure 6. Average peak force and holding force plotted against handle span: (A) university students and (B) factory workers. Error bars represent standard error of the mean.

Subjects were presented with random combinations of two load weights (0.3 kg and 1.3 kg) and two handle spans (4 cm and 7 cm). Three replications were made for each experimental condition, and the results were aver-

aged. The outcome of that study showed that subjects produced greater grip forces for the large handle span, $F(1,2) = 82.1, p < 0.01$. The force averaged over two load weights was 130 N ($SD = 49$ N) for a handle span of 4 cm

TABLE 7
Summary of Significant Trigger Effects

Subjects	Variable	Conventional Trigger		Extended Trigger	
		Finger	Palmar	Finger	Palmar
University students	Peak force (N)	130 (71)	153 (85)	119 (66)	142 (83)
	Peak exertion (%MVC)	50 (22)	60 (27)	47 (21)	56 (26)
	Average holding force (N)	29 (16)	38 (18)	18 (10)	26 (12)
	Average holding exertion level (%MVC)	13 (9)	14 (10)	8 (6)	13 (9)
Factory workers	Average holding force (N)	38 (11)	47 (13)	26 (9)	35 (12)
	Average holding exertion level (%MVC)	12 (5)	16 (6)	8 (4)	11 (5)

One standard deviation is listed in parenthesis. MVC = maximum voluntary contraction.
* $p = 0.05$.

and 150 N ($SD = 47$ N) for a handle span of 7 cm. This pilot experiment replicated the results of the current study using even more carefully controlled finger positions than when operating the power tool.

The significant Length \times Span interaction for the student group for peak finger and palmar forces (see Table 3) is illustrated in Figure 7. Tukey pairwise contrast tests showed that the small hands produced significantly less peak finger force ($p < 0.05$) and palmar force ($p < 0.01$) than did the medium and large hands, regardless of the handle span.

Peak finger and palmar exertion levels (defined as the ratio of peak force to MVC), averaged over the two trigger types, are plotted against handle span in Figure 8. Peak finger and palmar exertion levels for a handle span of 5 cm and 6 cm were less than for a handle span of 7 cm ($p < 0.05$) for the student group (see Table 5). Although hand forces for students were at a minimum for a handle span of 4 cm, exertion level was greater for 4 cm than it was for 5 cm and 6 cm (see Figure 8). This was likely because the minimum grip strength, which was used in the denominator, occurred for a handle span of 4 cm. Trigger type also had a significant effect on exertion level for the student group (see Table 3). On average, finger and palmar exertion levels for the conventional trigger were significantly greater than for the extended trigger (Table 7).

Tennis players are often warned not to choose a racquet grip that is too small (Brown, 1977; Gothard, 1990). Based on anecdotal evidence, Gothard (1990) explained that if a grip is too small, it causes more stress and strain on the arm because the player has to "squeeze harder" in order to hold the racquet properly. The results of this experiment indicated that although subjects used less grip force, they produced greater exertion levels for the small (4 cm) handle span than for any other span. This may explain

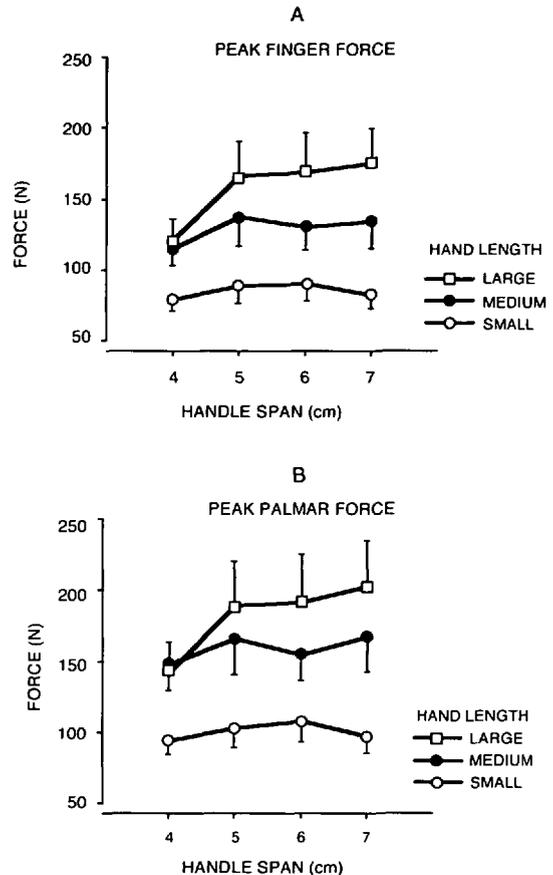


Figure 7. (A) Average peak finger force and (B) average peak palmar force plotted against handle span for the three hand size categories for university students. Error bars represent standard error of the mean.

why tennis players perceive that they squeeze harder when the racquet grip is too small.

Exertion levels were computed as the ratio of rapidly building submaximal peak forces to fully developed static strength measured after maximum force build-up has occurred. The faster a muscle shortens, the less tension it produces. Kroemer and Marras (1981) showed that the rate of force build-up is faster for maximum isometric exertions than for submaximal isometric exertion. Hence it is possible that exertion levels reported

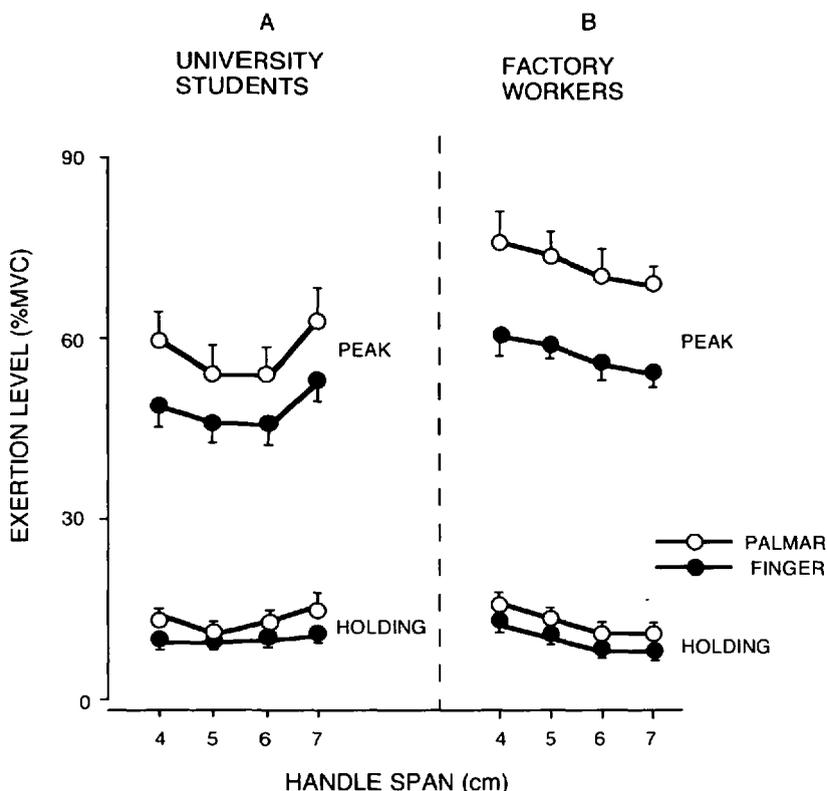


Figure 8. Average finger exertion level and palmar exertion level plotted against handle span for (A) university students and (B) factory workers. Error bars represent standard error of the mean.

in this study are underestimated. Fully developed isometric static strength (MVC) was chosen as a reference level in the current study because it is easy to control and measure.

Submaximal Forces While Holding the Tool between Operations

Tool-holding forces, averaged over the two trigger types, are plotted against handle span in Figure 6. Finger and palmar holding forces for the student group were significantly affected by handle span (see Table 3); however, these effects were small (see Figure 6). Finger and palmar holding forces for a handle span

of 4 cm were significantly less than holding force for the other handle spans (see Table 5).

Finger and palmar holding exertion level, averaged over two trigger types, are plotted against handle span in Figure 8. Span had a significant effect on palmar holding exertion level for the student group (see Table 3). Palmar holding exertion level for a handle span of 7 cm was significantly greater than for other handle spans (see Table 5). Span had a significant effect on both finger and palmar holding exertions for the worker group (see Table 4). Worker finger and palmar tool-holding exertion levels for smaller spans were greater than were exertion levels for larger spans (see Table 6).

Finger and palmar holding exertion levels for the extended trigger were significantly less than for the conventional trigger for both student and worker groups (see Tables 3 and 4). Exertion levels, stratified on trigger type, are included in Table 7. These results indicated that trigger type affected the manner in which the tools were handled, even when the tools were not being operated. When using the extended trigger, operators may have shifted more of the tool weight over the crotch of the first and second digits, thereby reducing the grip force requirements.

The Length \times Span interaction (see Figure 9) for the student subjects was significant for palmar holding exertion level (see Table 3). Tukey pairwise contrast tests showed that palmar holding exertion level for a handle span of 7 cm was significantly greater for the small-handed group than palmar holding exertion level for other spans ($p < 0.01$). Palmar holding exertion level for the small- and the medium-handed subjects was significantly greater than palmar holding exertion level for the large-handed subjects, regardless of handle span ($p < 0.05$).

Comparison between Finger and Palmar Hand Force Components

Peak palmar force was significantly greater than peak finger force for students, $F(1,286) = 6.4, p = 0.01$, and factory workers, $F(1,174) = 25.8, p < 0.001$. Regression analysis showed that peak finger force was linearly related to peak palmar force when regressed over all experimental conditions for students, $F(1,142) = 4467, p < 0.001$, and factory workers, $F(1,86) = 161, p < 0.001$.

Finger and palmar forces are mostly affected by the force needed to resist the torque reaction forces produced by the power tool. This is apparent from the large differences in peak forces produced during tool operation and tool-holding forces exerted between tool operations (see Figure 6). The holding force

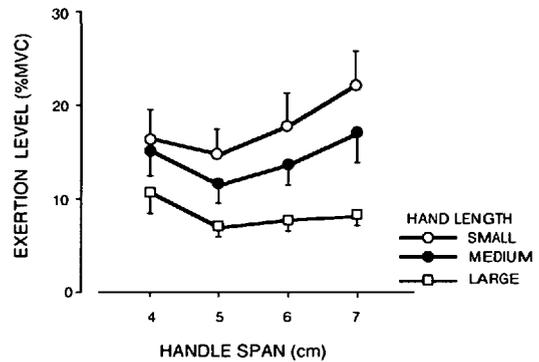


Figure 9. Palmar holding exertion level plotted against handle span for university students. Error bars represent standard error of the mean.

represents the force necessary for holding the tool in the hand while supporting the weight of the tool and air line (minus the counterbalancing force of the spring balancer). The difference between the finger and palmar forces represents the feed force necessary for keeping the tool socket engaged. The actual forces exerted by an operator may exceed the minimum forces required for holding and overcoming reaction forces. The handle span and trigger effects, therefore, represent the forces exerted by an operator in excess of the minimum force requirements.

Trigger Preferences

Of the total sample, 11 of the 18 student subjects (61%) and 5 of the 11 factory workers (45%) indicated that they preferred using the handle with the extended trigger. Use of the extended trigger resulted not only in less peak finger and palmar forces during tool operation but also in less finger and palmar tool-holding forces exerted between tool operations (see Table 7). The effect of trigger type was significant for finger and palmar holding forces for both student and worker subject groups (see Tables 3 and 4). Average finger tool-holding force for the student group was 65% greater for the conventional trigger than for the extended trigger, and

average palmar tool-holding force was 48% greater for the conventional trigger than for the extended trigger.

Similarly, finger holding force for the industrial worker group was 45% greater for the conventional trigger than for the extended trigger, and palmar holding force was 37% greater for the conventional trigger than for the extended trigger. Because the amount of operating time spent holding the tool was 76% in students and 65% in industrial subjects, using an extended trigger may be considerably beneficial throughout the work cycle.

Five of the seven students and four of the six workers who reported they preferred the conventional trigger explained that their decision was based on the concave curvature of the conventional trigger, rather than on trigger length (see Figure 2). These subjects indicated that if the extended trigger had a concave surface, they would have preferred the extended trigger. Two of the six workers who preferred using the conventional trigger said that their choice was based on the current tool they operated. Individual finger force was not measured. Therefore, it is not possible to see how force distribution among fingers is changed as trigger design changed.

Hand Size and Handle Span Preference

Hand anthropometry was considered as a factor for determining the optimum handle

span. The size of tennis racquet handles is sometimes determined by the distance from the tip of ring finger to the long line that crosses the center of the palm (Gothard, 1990). In this experiment hand length, palm length, and hand width were all significantly related to the subjectively preferred handle span and to the span resulting in the maximum grip strength for the student group (see Table 8).

The relationship between hand length and preferred handle span for the student group is illustrated in Figure 10. Because no significant difference was observed between preferred handle spans for the conventional trigger and the extended trigger, $F(1,34) = 0.1, p > 0.7$, pooled preferred handle spans were used for the regression analysis. No anthropometric measurements were related to the span resulting in the minimum peak exertion level. No significant relationship was observed between preferred span and the span resulting in the minimum peak exertion level, based on either finger force ($p > 0.6$) or palmar force ($p > 0.9$), regardless of trigger type and subject group.

These results suggest that selectable size handles may be more desirable than having only a single size handle for power hand tools. Average exertion level when holding the tool was less for the large-size hands than for the small-size hands (see Figure 9).

TABLE 8

Summary of Regression Relationships between Hand Anthropometry and Handle Span

<i>Dependent Variable</i>	<i>Independent variable</i>	<i>Slope</i>	<i>Intercept</i>	<i>R²</i>	<i>p</i>
Preferred handle span	Hand length	0.48	-3.21	0.59	0.00
	Palm length	0.89	-3.85	0.60	0.00
	Hand width	0.98	-2.59	0.48	0.00
Span at maximum grip strength	Hand length	1.41	10.31	0.27	0.03
	Palm length	0.85	5.73	0.33	0.01
	Hand width	0.59	4.96	0.24	0.04

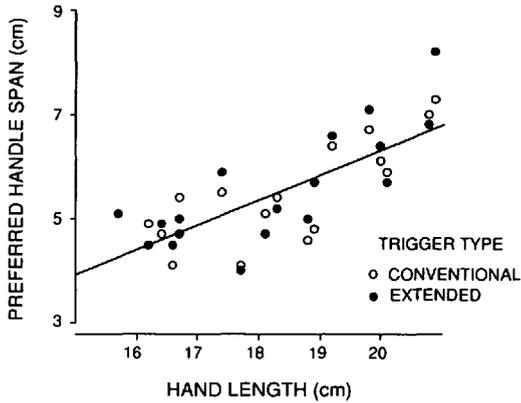


Figure 10. Preferred handle span plotted against hand length for university students.

Holding exertion level for the large hands was maximum for the 4-cm handle span, whereas holding exertion level for the small hands was maximum for the 7-cm handle span. Furthermore, the tendency was for large-handed subjects to subjectively prefer larger handle spans (see Figure 10).

University Student versus Industrial Factory Worker Subject Groups

Significant differences were observed between student and worker groups, including grip strength, peak forces, exertion levels, and holding forces.

A post hoc ANOVA showed that there was a significant difference in grip strength between students and workers, $F(1,108) = 4.8$, $p < 0.05$. Grip strength, averaged over handle span, was 279 N ($SD = 133$ N) for the student group and 327 N ($SD = 90$ N) for the worker group. There were no significant grip strength differences, however, between student and worker groups within each hand size, $F(3,108) = 0.5$, $p > 0.6$.

Peak finger, $F(1,230) = 39$, $p < 0.001$, and palmar forces, $F(1,230) = 48$, $p < 0.001$, were less for the student group than for the worker group (see Figure 6). The difference between peak palmar force and peak finger force was

significantly greater, $F(1,230) = 24$, $p < 0.001$, for workers than for students (see Figure 6). Peak finger exertion level, $F(1,230) = 13$, $p < 0.001$, and palmar exertion level, $F(1,230) = 21$, $p < 0.001$, were also less for the student group than for the worker group (see Figure 8). Finger holding force, $F(1,230) = 23$, $p < 0.001$, and palmar holding force, $F(1,230) = 19$, $p < 0.001$, were greater for the industrial workers than for the university students (see Figure 6). No significant differences were observed between the student group and the worker group for either finger holding exertion level ($p > 0.8$) or for palmar holding exertion level ($p > 0.9$).

No significant span effects for either finger or palmar exertion levels were observed for the worker group; however, there was a significant span effect for the student group (see Figure 8). Furthermore, the effect of trigger type was not significant (see Table 4) for the worker group, whereas it was marginally significant (see Table 3) for the student group.

Differences between student and worker groups may result from distinct differences in their anthropometric characteristics and strength distribution (see Tables 1 and 2). There were no subjects with small hands ($L \leq 17$ cm) included in the worker sample, whereas there were six subjects with small hands in the student population. Average grip strength for the workers was 17% greater than for the students. Of the student subjects, 61% were female, whereas only 27% of the worker subjects were female. Other differences were the subject sampling methods used between the two subject populations and differences in experience using pistol grip power tools. Factory worker subjects were recruited based on their experience using power hand tools and on the similarity between the tools they had used and the tool in this experiment. Biased sampling is represented well by the anthropometric differences and gender distribution.

It is also possible that the workers' previous experience operating pistol grip power hand tools influenced the results. Many operators were accustomed to push-to-start pistol grip power hand tools using a conventional trigger. Their behavior operating these tools in their jobs may have transferred over to this experiment. Push-to-start tools require exerting additional palm force in addition to squeezing the trigger in order to operate the tool. This would explain the high palmar forces exerted by the industrial subjects (see Figure 6). Although 15 min were given for training and three replications were made for each condition, this preparation may not be long enough. Workers' experience may also have influenced their selection of the preferred handle span. The range of preferred handle spans for the worker group was smaller (4.7 cm to 6.5 cm) than that of the medium and large hands for the student group (4.0 cm to 8.2 cm). Of 11 workers, 8 commented that their preferred handle size was similar to the tool handle size they currently used in their job. Therefore, it is recommended that future studies provide a more suitable period of training and time to become accustomed to these differences.

CONCLUSIONS

This study investigated the effect of handle size and trigger type on forces and exertions produced during pistol grip pneumatic power tool operation using university student and industrial worker subjects. The results of these experiments led to the following conclusions.

1. Handle span affected submaximal finger and palmar forces. Peak finger force increased 24% for the student group and 30% for the worker group as handle span increased from 4 cm to 7 cm. Similarly, peak palmar force increased 22% for both the student and worker groups as handle span increased from 4 cm to 7 cm. Although peak

finger and palmar forces were minimum for a handle span of 4 cm, grip exertion levels were minimum for a handle span of 5 cm to 6 cm. Handle span also influenced average finger and palmar tool-holding forces. Both finger and palmar holding force increased 20% as handle span increased from 4 cm to 7 cm for student subjects.

2. Hand size affected grip strength, hand force, and exertion level. Large-handed subjects produced their maximum grip strength for a handle span of 6 cm, whereas medium- and small-handed subjects produced their maximum strength for a handle span of 5 cm. Small-handed subjects exerted significantly less peak finger force and palmar force than did medium- and large-handed subjects, regardless of handle span. Holding exertion level for large-handed subjects was maximum when using a 4-cm handle and maximum for the small-handed subjects when using a 7-cm handle. Hand size was also proportional to preferred handle span.

3. Use of an extended trigger affected how the tool was handled. The extended trigger may be beneficial in terms of reduced hand force and exertion levels during tool operation. Average peak finger and palmar forces during tool operation for the student group were 9% and 8%, respectively, and less for the extended trigger than for the conventional trigger. Average finger and palmar tool-holding force between tool operations was 65% and 48%, respectively, and less for the extended trigger than for the conventional trigger. Similar effects were observed for industrial subjects.

ACKNOWLEDGMENTS

This research was supported by a grant from the Ingersoll-Rand Company. We wish to thank the workers and plants that participated in this study. Our appreciation is extended to Edward Gisske for assistance in constructing the apparatus and to John Dreger for mounting the strain gauges. Assistance from John Blackburn, Robert Bruno, John Estep, Steven Grall, Fred Lupton, Ronald Meister, Daniel Mootz, Steven Thiry, William Waterbury, and William White is also acknowledged.

REFERENCES

- Amis, A. A. (1987). Variation of finger forces in maximal isometric grasp tests on a range of cylinder diameters. *Journal of Biomedical Engineering*, 9, 313–320.
- Armstrong, T. J. (1986). Ergonomics and cumulative trauma disorders. *Occupational Injuries*, 2, 553–565.
- Armstrong, T. J., Radwin, R. G., Hansen, D. J., and Kennedy, K. W. (1986). Repetitive trauma disorders: Job evaluation and design. *Human Factors*, 28, 325–336.
- Ayoub, M. M., and Lo Presti, P. (1971). The determination of an optimum size cylindrical handle by use of electromyography. *Ergonomics*, 14, 509–518.
- Bonnici, A. V., and Spencer, J. D. (1988). A survey of "trigger finger" in adults. *Journal of Hand Surgery*, 13B, 202–203.
- Brown, J. (1977). *Tennis without lessons*. Englewood Cliffs, NJ: Prentice-Hall.
- Fitzhugh, F. E. (1973). *Dynamic aspects of grip strength* (Tech. Report). Ann Arbor: University of Michigan, Department of Industrial and Operations Engineering.
- Gothard, S. A. (1990). Equipment check: Get a handle on your grip size. *Tennis*, 26, 76.
- Greenberg, L., and Chaffin, D. B. (1975). *Workers and their tools: A guide to the ergonomic design of hand tools and small presses*. Midland, MI: Pendell.
- Greiner, T. M. (1991). *Hand anthropometry of U.S. Army personnel* (Tech. Report NATICK/TR-72/011). Natick, MA: U.S. Army Natick Research, Development and Engineering Center.
- Hertzberg, H. T. E. (1955). Some contributions of applied physical anthropology to human engineering. *Annals of the New York Academy of Science*, 63, 616–629.
- Kroemer, K. H. E., and Marras, W. S. (1981). Evaluation of maximal and submaximal static muscle exertions. *Human Factors*, 23, 643–653.
- Lindqvist, B., Ahlberg, E., and Skogsberg, L. (1986). *Ergonomic tools in our time*. Stockholm: Atlas Copco Tools.
- Nasca, R. J. (1980). Trigger finger: A common hand problem. *Journal of the Arkansas Medical Society*, 76, 388–390.
- Petrofsky, J. S., Williams, C., Kamen, G., and Lind, A. R. (1980). The effect of handgrip span on isometric exercise performance. *Ergonomics*, 23, 1129–1135.
- Pronk, C. N. A., and Niesing, R. (1981). Measuring hand grip force using a new application of strain gauges. *Medical, Biological Engineering and Computing*, 19, 127–128.
- Putz-Anderson, V. (1988). *Cumulative trauma disorders*. New York: Taylor & Francis.
- Radwin, R. G., Masters, G. P., and Lupton, F. W. (1991). A linear force-summing hand dynamometer independent of point of application. *Applied Ergonomics*, 22, 339–345.
- Radwin, R. G., Oh, S., Jensen, T. R., and Webster, J. G. (1992). External finger forces in submaximal five-finger static pinch prehension. *Ergonomics*, 35, 275–288.
- Rauko, M., Herranen, S., and Vuori, M. (1988). Ergonomics of powered hand tools on assembly line work. *Trends in Ergonomics/Human Factors*, 5, 211–217.
- Schmidt, R. T., and Toews, J. V. (1970). Grip strength as measured by the Jamar dynamometer. *Archives of Physical Medicine & Rehabilitation*, 51, 321–327.
- Swanson, A. B., Matev, I. B., and De Groot, G. (1970, Fall). The strength of the hand. *Bulletin of Prosthetics Research*, pp. 145–153.
- Young, V. L., Pin, P., Kraemer, B. A., Gould, R. B., Nemerut, L., and Pellowski, M. (1989). Fluctuation in grip and pinch strength among normal subjects. *Journal of Hand Surgery*, 14A, 125–129.

The Authors

PASCALE CARAYON (*Effect of Electronic Performance Monitoring on Job Design and Worker Stress: Review of the Literature and Conceptual Model*) received an engineering diploma from the Ecole Centrale de Paris and a Ph.D. degree in industrial engineering from the University of Wisconsin-Madison, where she has been an assistant professor of industrial engineering since 1989. She has conducted research in the areas of occupational stress and health, work organization, VDT ergonomics, and the sociotechnical effects of new technologies. Her research interests concern the influence of technology on work systems, stress, and health.

NEFF WALKER and RICHARD CATRAMBONE (*Aggregation Bias and the Use of Regression in Evaluating Models of Human Performance*)

NEFF WALKER received his Ph.D. in psychology from Columbia University in 1983. Since then he has been an assistant professor at the American University of Beirut and a visiting assistant professor at the University of Michigan. He is currently an assistant professor at the Georgia Institute of Technology.

RICHARD CATRAMBONE received his Ph.D. in psychology from the University of Michigan in 1988. He is currently an assistant professor of psychology at the Georgia Institute of Technology.

P. A. HANCOCK and J. K. CAIRD (*Experimental Evaluation of a Model of Mental Workload*)

P. A. HANCOCK attended Loughborough College of Education, Leicestershire, England, from 1972 through 1976 and received both teacher certification and the Bachelor of Education degree. In 1978 he was awarded the Master of Science degree from Loughborough University, with his major area of work concerning computer modeling of physiological systems. He received the Ph.D. degree in 1983 from the University of Illinois, where his dissertation research concerned the human perception of time. From 1983 to 1989 he was an assistant professor in the Departments of Safety Science and Human Factors at the University of Southern California. In September 1989 he took an appointment as an associate professor at the University of Minnesota, where he directs the Human Factors Research Laboratory. He is the coeditor, with John Flach, Jeff Caird, and Kim Vicente, of a forthcom-

ing text on the application of ecological principles to human factors. His present research concerns operator strategies in performance under time stress and the use of virtual reality in human factors applications.

J. K. CAIRD received a B.S. degree in psychology from the University of Wyoming, an M.S. degree in kinesiology from the University of Colorado, and a Ph.D. in human factors and cognitive science at the University of Minnesota while on a predoctoral fellowship from the university's Center for Research in Learning, Cognition, and Perception. He recently accepted a position at the University of Calgary, where he is part of the Industrial/Organizational and Ergonomic program in the Department of Psychology. In addition to research on mental workload, he is also interested in perception-action issues, transportation human factors, and interactive interface development for scientific visualization and virtual environment systems.

NEFF WALKER, DAVID E. MEYER, and JOHN B. SMELCER (*Spatial and Temporal Characteristics of Rapid Cursor-Positioning Movements with Electromechanical Mice in Human-Computer Interaction*)

NEFF WALKER. See above for biography.

DAVID E. MEYER is currently a professor of psychology at the University of Michigan, where he received his Ph.D. in 1969. Between 1969 and 1977, he was a member of the technical staff at AT&T Bell Laboratories, Murray Hill, New Jersey. His professional activities have included service on a National Institute of Mental Health review panel and the editorial boards of several scientific journals.

JOHN B. SMELCER is currently an assistant professor of management information systems at the American University. He received his Ph.D. in computer information systems from the University of Michigan in 1989.

SALLIE E. GORDON, KIMBERLY A. SCHMIERER, and RICHARD T. GILL (*Conceptual Graph Analysis: Knowledge Acquisition for Instructional System Design*)

SALLIE E. GORDON is an associate professor in the Department of Psychology at the University of Idaho. She received her Ph.D. in psychology in 1982 from the University of Illinois, Champaign-Urbana. She taught at Wright State University and worked

for Klein Associates before moving to Idaho in 1985. She has conducted research in applied cognition and instructional design and is publishing a book on the ergonomic design of training programs (Prentice-Hall, 1994).

KIMBERLY A. SCHMIERER received her B.A. degree in psychology from the University of Idaho and is currently working in Boise, Idaho.

RICHARD T. GILL is an associate professor in the Department of Mechanical Engineering at the University of Idaho. He received his Ph.D. in industrial engineering from the University of Illinois, Champaign-Urbana. He currently teaches a variety of courses in engineering and human factors and conducts research on safety, warning label design, and instructional methods.

RANDY L. SOLLENBERGER and PAUL MILGRAM (*Effects of Stereoscopic and Rotational Displays in a Three-Dimensional Path-Tracing Task*)

RANDY L. SOLLENBERGER is currently a Ph.D. student in the Psychology Department at the University of Toronto. He received a B.A. from Shippensburg State University of Pennsylvania and an M.A. from the University of Toronto. His research interests include depth perception, human factors, and computer graphics.

PAUL MILGRAM received a B.A.Sc. in engineering science at the University of Toronto in 1970, an M.S.E.E. degree in electrical engineering at the Technion, Israel in 1973, and a Ph.D. in human factors/industrial engineering at the University of Toronto in 1980. From 1980 to 1982 he was a ZWO Visiting Scientist and a NATO Postdoctoral Fellow at the TNO Institute for Perception in Soesterberg, Netherlands. From 1982 to 1986 he was a senior research engineer at the National Aerospace Laboratory in Amsterdam. Since 1986 he has been with the Industrial Engineering Department at the University of Toronto, where he is now an associate professor. His research interests include human performance modeling, display issues in telerobotics, stereoscopic video and computer graphics, psychophysiological modeling, and human factors in medicine, especially anesthesiology. He is also president of Translucent Technologies Inc., a Toronto company that manufacturers and markets PLATO liquid crystal visual occlusion spectacles, for visual and psychomotor research.

NAUM YAKIMOFF, STEFAN MATEEFF, WALTER H. EHRENSTEIN, and JOACHIM HOHNSBEIN (*Motion Extrapolation Performance: A Linear Model Approach*)

NAUM YAKIMOFF received his undergraduate degree in physics in 1968 from Sofia University, his Ph.D. in physiology in 1973 from the Soviet Academy of Sciences, and his D.Sc. in 1988 from the Bulgarian Academy of Sciences, where he is currently a professor and Scientific Secretary General. Since 1990 he has also been a professor of the physiology of vision at the New Bulgarian University. Since 1992 he has been editor-in-chief of *Acta Physiologica et Pharmacologica Bulgarica*. His research interests include the perception of form, pattern, and motion.

STEFAN MATEEFF is a research professor at the Institute of Physiology of the Bulgarian Academy of Sciences, where he obtained his D.Sc. in 1990. He received his undergraduate degree in physics in 1968 from the University of Sofia and a Candidate of Science degree in 1973 from the Soviet Academy of Sciences. His research interests are psychophysics and human perception and performance.

WALTER H. EHRENSTEIN is with the Department of Sensory Physiology and Neurophysiology at the Institut für Arbeitsphysiologie at the University of Dortmund, where he conducts psychophysical and electrophysiological research in human perception. He also teaches at the University of Düsseldorf. He obtained his doctorate in experimental psychology in 1977 at the University of Göttingen and has worked at the University of California San Diego, the University of Konstanz, and the University of Freiburg.

JOACHIM HOHNSBEIN graduated in physics in 1975 at the University of Bochum and received his doctorate in physiology in 1981 at the University of Marburg. He is on the research staff of the Institut für Arbeitsphysiologie at the University of Dortmund and since 1990 has been *Dozent* in physiology at the University of Bochum. He is a private pilot and conducts research in visual perception, information processing, and human electrical and magnetic evoked potentials.

V. GRAYSON CUQLOCK-KNOPP and LESLIE A. WHITAKER (*Spatial Ability and Land Navigation under Degraded Visual Conditions*)

V. GRAYSON CUQLOCK-KNOPP received a Ph.D. in engineering psychology from the University of Illinois at Urbana-Champaign in 1983. She held a postdoctoral research appointment in quantitative psychology at Johns Hopkins University in 1984. She is now a research psychologist in the Visual and Auditory Processes Branch of the U.S. Army Research Laboratory, Aberdeen Proving Ground, Maryland. Her chief research interests are

visual performance using indirect viewing devices, perceptual learning, and off-road navigation.

LESLIE A. WHITAKER received her Ph.D. from Pennsylvania State University in experimental psychology in 1975. She completed a postdoctoral fellowship at Groton Naval Underwater Medical Research Laboratory. She is currently an associate professor at the University of Dayton. Her research and professional interests include decision support systems, decision making, performance, and cognitive modeling.

CATHERINE BERTHELON and DANIEL MESTRE (*Curvilinear Approach to an Intersection and Visual Detection of a Collision*)

CATHERINE BERTHELON obtained her Ph.D. in psychology from the University of Provence (Aix-Marseille I, France) in 1988. Since 1982 she has been doing research for INRETS (French National Institute for Research on Transportation and Safety, Department of Accident Mechanism Analysis) in the field of car driving and the evaluation of perceptual factors in road accidents.

DANIEL MESTRE obtained his Ph.D. in psychology from the University of Provence (Aix-Marseille I, France) in 1987. Since 1984 he has been conducting research for the CNRS (French National Center for Scientific Research). His research interests focus on the role of visual information during self-motion. His interests in human factors concern the relation between subject sensitivity to visual motion and displacement abilities.

MARK FREEDMAN, PAUL ZADOR, and LOREN STAPLIN (*Effects of Reduced Transmittance Film on Automobile Rear Window Visibility*)

MARK FREEDMAN received a B.S. degree in civil engineering from Drexel University in 1970 and an M.S. degree in transportation engineering from the University of Pennsylvania in 1972. For one year he worked as a consulting traffic engineer and since 1973 has been conducting traffic safety research. Currently, he is manager of transportation safety research at Westat, Inc. in Rockville, Maryland. His research has focused on issues of driver behavior and traffic speed. He has conducted human factors research concerning driver visual capabilities; visibility of signs, signals, and delineation; pedestrian safety; and roadway lighting.

PAUL ZADOR holds a bachelor's degree from Oxford University and a Ph.D. in mathematical statistics from Stanford University. He is currently a senior statistician at Westat, Inc. in Rockville, Maryland. His research activities include analyses of the effectiveness of laws concerning alcohol-impaired driving, motorcycle helmet use, and daytime running lights; comparisons of the effectiveness of air bags and seat belts; and evaluations of driver education programs. He also provides general statistical and mathematical support for Westat.

LOREN STAPLIN holds a Ph.D. in psychology from Arizona State University. Currently, he is the director of the Human Factors Division of The Scientex Corporation in Lansdale, Pennsylvania. He is active on the Transportation Research Board of the National Research Council in the areas of motorist information systems, simulation, and aging driver needs and capabilities. His research interests include improved vehicle and highway engineering practices through facilitation of operator perceptual and cognitive performance.

SEOUNGYEON OH and ROBERT G. RADWIN (*Pistol Grip Power Tool Handle and Trigger Size Effects on Grip Exertions and Operator Preference*)

SEOUNGYEON OH is a graduate student at the University of Wisconsin-Madison in the Department of Industrial Engineering. She has a B.S. in industrial engineering from the Seoul National University and an M.S. degree from the University of Wisconsin. She is currently a research assistant at the University of Wisconsin-Madison, where she is pursuing a Ph.D. degree in human factors.

ROBERT G. RADWIN is an associate professor at the University of Wisconsin-Madison, Department of Industrial Engineering, where he conducts research in and teaches ergonomics and human factors engineering. He completed a B.S.E. in electrical engineering from the Polytechnic Institute of New York, and M.S. degrees in electrical engineering and bioengineering from the University of Michigan, where he earned his Ph.D. in industrial and operations engineering and was a research fellow at the Center for Ergonomics. He is actively studying the causes and prevention of cumulative trauma disorders in manual work.